



Configuration Schematic

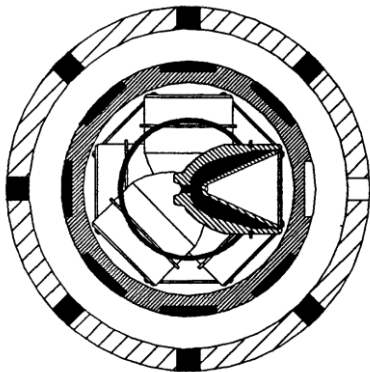

Shot Pattern

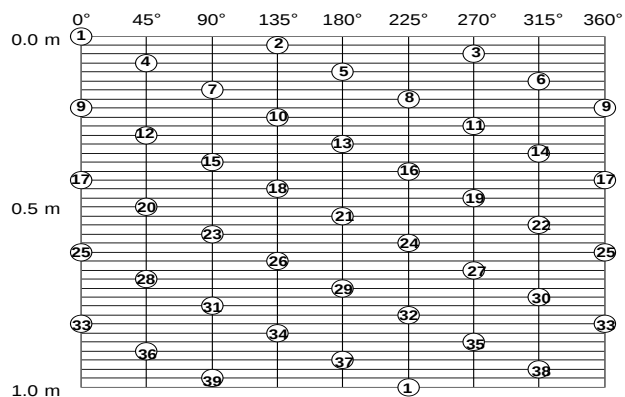

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scalloped
Pressure Rating	130 MPa / 18,900 psi
Temperature Rating	230°C / 450°F
Tensile Strength	2,800,000 N / 630,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	3.938" - 6 TPI Acme

Only to be shot in fluid when using zinc charges

Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	40	70.0 kg net
2 m	2.33 m	79	121.0 kg net
3 m	3.33 m	118	172.0 kg net
4 m	4.33 m	157	223.0 kg net
5 m	5.33 m	196	275.0 kg net
6 m	6.33 m	235	325.0 kg net

Selection Chart

Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 39g DP	2316684	2316687	2316689	2316691	2316693	2316695
Charge Tube for 39g DP	2316670	2316673	2316675	2316677	2316679	2316681
Gun System for 61g BH	2315801	2315811	2315813	2315815	2315817	2315819
Charge Tube for 61g BH	2315788	2315790	2315792	2315794	2315796	2315798
Carrier	2315762	2315764	2315766	2315768	2315770	2315772
Retention Ring	7903024					
Booster Kit	2315319					
Spacer Gun Kit	-					