



Configuration Schematic

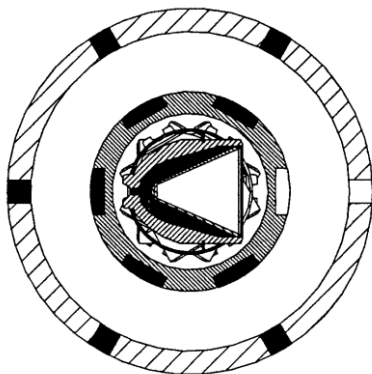

Shot Pattern

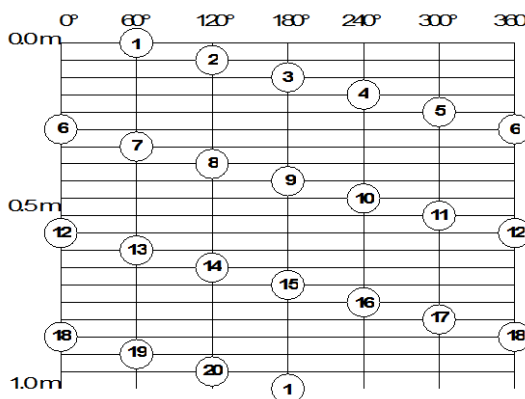

Technical Information

Carrier Specifications	
Pressure Rating	172 MPa / 25,000psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	284000N / 63846 lbs
Tandem Shot Spacing	0.33 m / 1.08 ft
Carrier Thread	1.275" - 12 TPI Acme


Only to be shot in fluid when using zinc charges

Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	21	6.0 kg net
2 m	2.33 m	41	11.0 kg net
3 m	3.33 m	61	15.5 kg net
4 m	4.33 m	81	20.0 kg net
5 m	5.33 m	101	25.0 kg net
6 m	6.33 m	121	30.0 kg net


Selection Chart

Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 3 g DP	2316247	2316249	2316251	2316253	2316255	2316257
Charge Tube for 3 g DP	2316273	2316275	2316277	2316279	2316281	2316283
Carrier	2316300	2316302	2316304	2316306	2316308	2316310
Retention Ring	7903165					
Booster Kit	2315723					
Spacer Gun Kit	On request					

Configuration Schematic

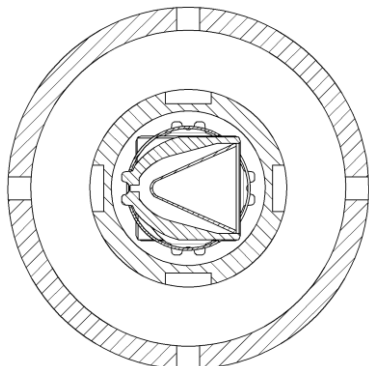

Shot Pattern

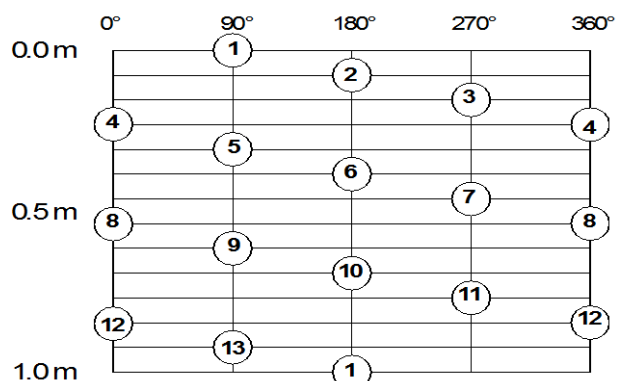

Technical Information

Carrier Specifications	
Pressure Rating	172 MPa / 25,000psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	284000N / 63846 lbs
Tandem Shot Spacing	0.33 m / 1.08 ft
Carrier Thread	1.275" - 12 TPI Acme

Only to be shot in fluid when using zinc charges

Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.26 m	14	6.0 kg net
2 m	2.26 m	27	11.0 kg net
3 m	3.26 m	40	15.5 kg net
4 m	4.26 m	53	20.0 kg net
5 m	5.26 m	66	25.0 kg net
6 m	6.26 m	79	30.0 kg net

Selection Chart

Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 3 g DP	2316234	2316236	2316238	2316240	2316242	2316244
Charge Tube for 3 g DP	2316260	2316262	2316264	2316266	2316268	2316270
Carrier	2316286	2316288	2316290	2316292	2316295	2316297
Retention Ring	7903165					
Booster Kit	2315723					
Spacer Gun Kit	On request					