



Configuration Schematic

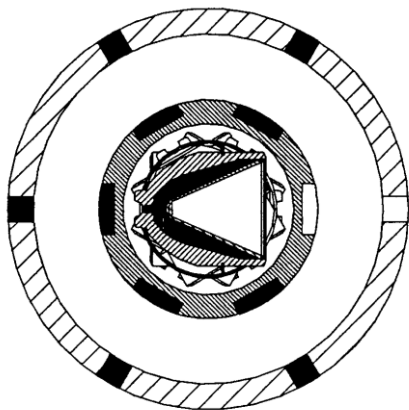

Shot Pattern

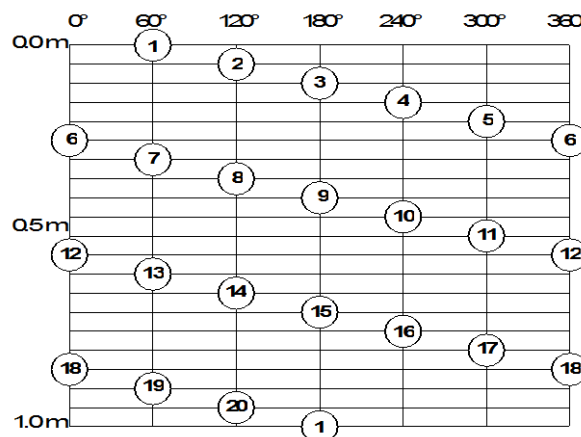

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scalloped
Pressure Rating	179 MPa / 26,000 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	1,380,000 N / 310,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	2-3/8" - 6 TPI Acme

Only to be shot in fluid when using zinc charges


Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	21	18.0 kg net
2 m	2.33 m	41	32.0 kg net
3 m	3.33 m	61	45.5 kg net
4 m	4.33 m	81	59.0 kg net
5 m	5.33 m	101	72.5 kg net
6 m	6.33 m	121	86.0 kg net

Selection Chart


Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 15g DP	2314698	2314700	2314702	2314704	2314706	2314708
Charge Tube for 15g DP	2315043	2315045	2315047	2315049	2315051	2315053
Carrier	2314897	2314900	2314902	2314904	2314906	2314908
Retention Ring	7902746					
Booster Kit	2315319					
Spacer Gun Kit	2315366					

Guns are available in 0.5m increments to a length of 7m with part numbers on request

Configuration Schematic

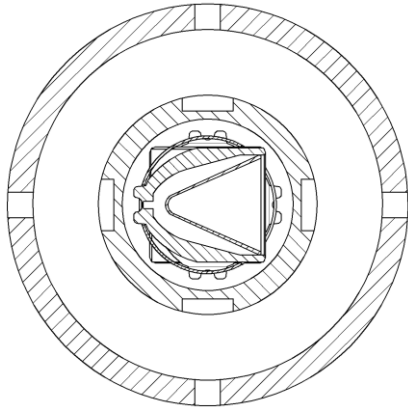

Shot Pattern

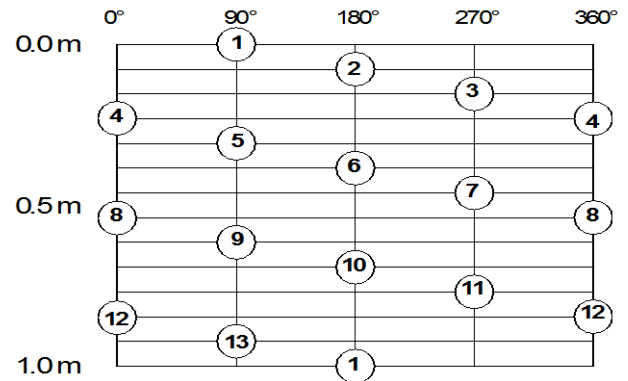

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scalloped
Pressure Rating	179 MPa / 26,000 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	1,380,000 N / 310,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	2-3/8" - 6 TPI Acme

Only to be shot in fluid when using zinc charges

Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	14	18.5 kg net
2 m	2.33 m	27	32.5 kg net
3 m	3.33 m	40	46.0 kg net
4 m	4.33 m	53	60.0 kg net
5 m	5.33 m	66	73.5 kg net
6 m	6.33 m	79	87.5 kg net

Selection Chart

Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 15g DP	2314683	2314685	2314689	2314691	2314693	2314695
Charge Tube for 15g DP	2315029	2315032	2315034	2315036	2315038	2315040
Carrier	2314884	2314886	2314888	2314890	2314892	2314894
Retention Ring	7902746					
Booster Kit	2315319					
Spacer Gun Kit	2315366					

Guns are available in 0.5m increments to a length of 7m with part numbers on request