



Configuration Schematic

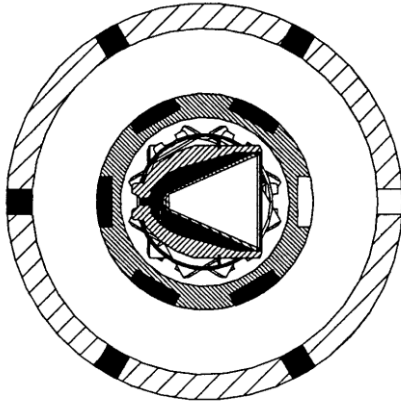

Shot Pattern

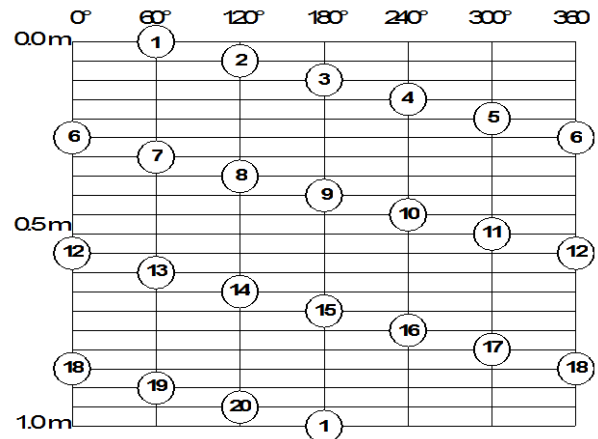

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scalloped
Pressure Rating	179 MPa / 26,000 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	138,000 N / 310,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	2-3/8" - 6 TPI Acme

Only to be shot in fluid when using zinc charges


Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	21	21.0 kg net
2 m	2.33 m	41	36.5 kg net
3 m	3.33 m	61	52.5 kg net
4 m	4.33 m	81	68.0 kg net
5 m	5.33 m	101	83.5 kg net
6 m	6.33 m	121	99.5 kg net

Selection Chart


Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 15g DP	2314724	2314726	2314728	2314730	2314732	2314734
Charge Tube for 15g DP	2315069	2315071	2315073	2315075	2315077	2315079
Carrier	2314924	2314926	2314928	2314930	2314932	2314934
Retention Ring	7902747					
Booster Kit	2315319					
Spacer Gun Kit	2315367					

Guns are available in 0.5m increments to a length of 7m with part numbers on request

Configuration Schematic

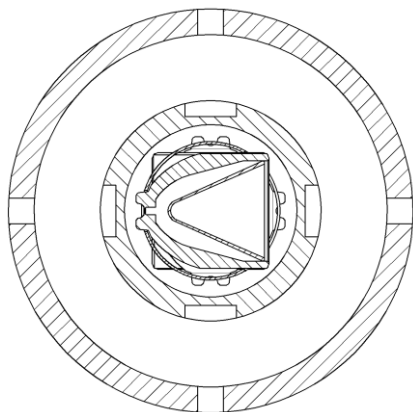

Shot Pattern

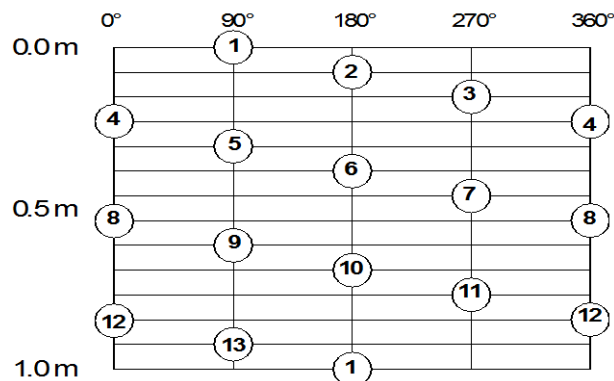

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scalloped
Pressure Rating	179 MPa / 26,000 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	1,380,000 N / 310,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	2-3/8" - 6 TPI Acme

Only to be shot in fluid when using zinc charges

Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	14	21.5 kg net
2 m	2.33 m	27	37.5 kg net
3 m	3.33 m	40	53.0 kg net
4 m	4.33 m	53	69.0 kg net
5 m	5.33 m	66	85.0 kg net
6 m	6.33 m	79	101.0 kg net

Selection Chart

Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 15g DP	2314711	2314713	2314715	2314717	2314719	2314721
Charge Tube for 15g DP	2315056	2315058	2315060	2315062	2315064	2315066
Carrier	2314911	2314913	2314915	2314917	2314919	2314921
Retention Ring	7902747					
Booster Kit	2315319					
Spacer Gun Kit	2315367					

Guns are available in 0.5m increments to a length of 7m with part numbers on request