



Configuration Schematic

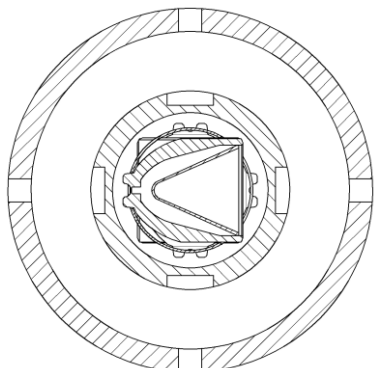

Shot Pattern

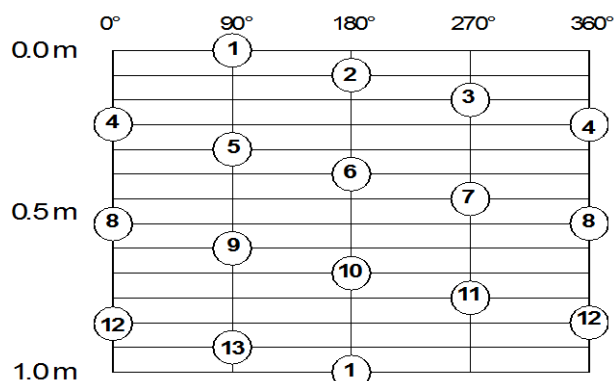

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scalloped
Pressure Rating	172 MPa / 25,000 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	2,000,000 N / 450,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	2.812" - 6 TPI Acme


Only to be shot in fluid when using zinc charges

Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	14	26.0 kg net
2 m	2.33 m	27	45.5 kg net
3 m	3.33 m	40	65.0 kg net
4 m	4.33 m	53	84.5 kg net
5 m	5.33 m	66	104.0 kg net
6 m	6.33 m	79	123.5 kg net


Selection Chart

Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 22.7 DP / 23 DP / 23 GH / 24 DP	2314737	2314740	2314742	2314744	2314746	2314748
Charge Tube for 22.7 DP / 23 DP / 23 GH / 24 DP	2315082	2315084	2315086	2315088	2315090	2315092
Gun System for 22.7g BH	2314764	2314766	2314768	2314770	2314772	2314774
Charge Tube for 22.7g BH	2315108	2315110	2315112	2315114	2315116	2315118
Gun System for 32g DP1/DP2/BH	2314790	2314792	2314794	2314796	2314798	2314800
Charge Tube for 32g DP1/DP2/BH	2315134	2315136	2315138	2315140	2315142	2315144
Carrier	2314937	2314939	2314941	2314943	2314945	2314947
Retention Ring	7902748					
Booster Kit	2315319					
Spacer Gun Kit	2315369					

Configuration Schematic

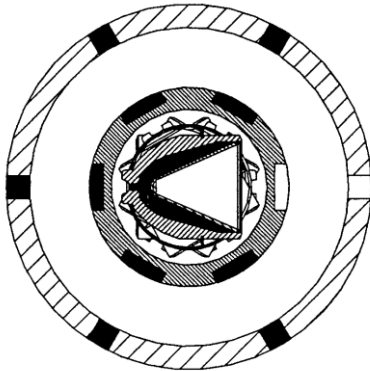

Shot Pattern

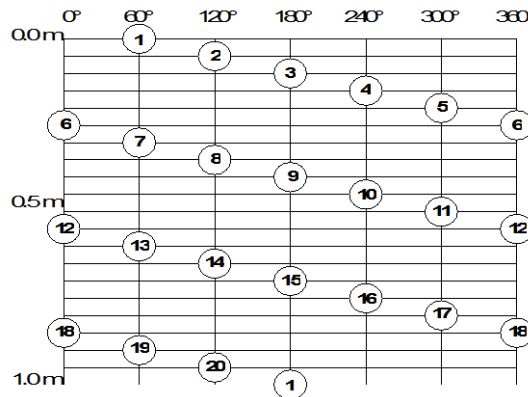

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scalloped
Pressure Rating	172 MPa / 25,000 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	200,000 daN / 450,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	2.812" - 6 TPI Acme


Only to be shot in fluid when using zinc charges

Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	21	25.5 kg net
2 m	2.33 m	41	44.5 kg net
3 m	3.33 m	61	63.5 kg net
4 m	4.33 m	81	82.5 kg net
5 m	5.33 m	101	101.0 kg net
6 m	6.33 m	121	120.0 kg net


Selection Chart

Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 22.7g BH	2316458	2316460	2316462	2316464	2316466	2316468
Charge Tube for 22.7g BH	2316484	2316486	2316488	2316490	2316492	2316495
Gun System for 26g DP	2315728	2315730	2315732	2315734	2315736	2315738
Charge Tube for 26g DP	2315741	2315743	2315745	2315747	2315749	2315751
Carrier	2314950	2314952	2314954	2314956	2314958	2314960
Retention Ring	7902748					
Booster Kit	2315319					
Spacer Gun Kit	2315369					

Configuration Schematic

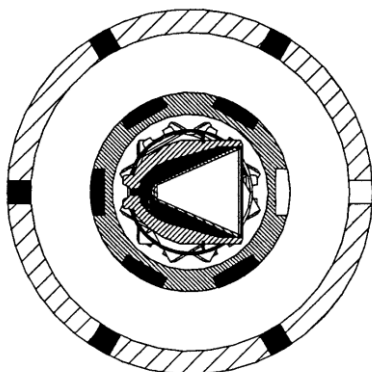

Shot Pattern

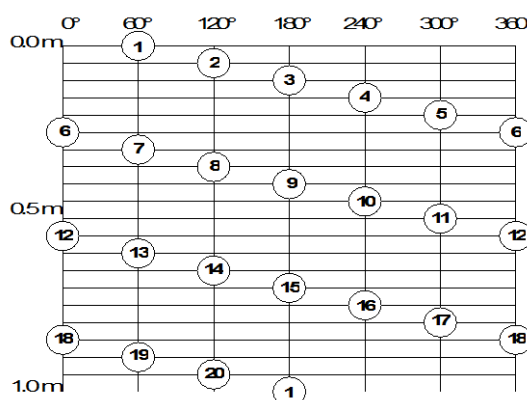

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scalloped
Pressure Rating	172 MPa / 25,000 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	200,000 daN / 450,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	2.812" - 6 TPI Acme

Only to be shot in fluid when using zinc charges

Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	21	25.5 kg net
2 m	2.33 m	41	44.5 kg net
3 m	3.33 m	61	63.5 kg net
4 m	4.33 m	81	82.5 kg net
5 m	5.33 m	101	101.0 kg net
6 m	6.33 m	121	120.0 kg net

Selection Chart

Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 22.7 DP / 23 DP / 23 GH / 24g DP	2314751	2314753	2314755	2314757	2314759	2314761
Charge Tube for 22.7 DP / 23 DP / 23 GH / 24g DP	2315095	2315097	2315099	2315101	2315103	2315105
Gun System for 22.7g BH	2314777	2314779	2314781	2314783	2314785	2314787
Charge Tube for 22.7g BH	2315121	2315123	2315125	2315127	2315129	2315131
Gun System for 26g DP / 26g GH <i>Only to be shot in fluid</i>	2317242	2317244	2317236	2317248	2317250	2317237
Charge Tube for 26g DP / 26g GH <i>Only to be shot in fluid</i>	2317254	2317256	2317238	2317259	2317261	2317240
Carrier	2314950	2314952	2314954	2314956	231458	2314960
Retention Ring	9702748					
Booster Kit	2315319					
Spacer Gun Kit	2315369					